



## D579\* РЕШЕТКА С КОЗЫРЬКОМ

из нержавеющей стали, с антимоскитной сеткой

### СВОЙСТВА ПРОДУКТА


#### Круглая наружная решетка с защитной сеткой от насекомых

- Конструкция из нержавеющей стали для настенного монтажа
- Для приточных и вытяжных вентиляционных систем
- С наклонными жалюзи, соединительным патрубком, резиновым уплотнителем и проволочной сеткой
- Материал: Нержавеющая сталь 304/2В
- Упакованы в прозрачный полиэтиленовый пакет
- В комплекте 2 самореза из нержавеющей стали и каплесборник

Каждые три месяца экран следует чистить во избежание засорений

Код	Тип мм	D(dia) мм	A(dia) мм	C мм	E мм	Q м³/ч	Вес гр.
D579311	100	100	150	115	42	60	161
D579611	125	125	190	145	48	80	258
D579811	150	150	210	155	55	125	346
D579911	160	155	210	165	55	135	346
D579211	200	195	253	205	62	-	930

Поток воздуха(Q) selected by Veff = 4м/сек.




#### ТИП: D579\*11

#### ТИП: D579\*11-L



Каплесборник устанавливается внизу решетки для предотвращения стекания воды по фасаду.



#### LIABILITY:

The information contained in this brochure was current on the publication date. DEC INTERNATIONAL reserves the right to make changes in details at any time without prior notice. In order to avoid misunderstandings, any interested party is advised to contact DEC INTERNATIONAL checking for any changes in materials and/or information after this brochure was published.

#### PLEASE NOTICE:

The consultant is responsible for the actual installation and mounting of the product. The mentioned values with respect to temperatures are not appropriate to be used to determine the physical properties. These properties are also dependent on humidity and the temperature of the air inside and outside of the H.V.A.C. system.

#### TRADEMARKS:

DEC International and the DEC logo are trademarks, or registered trademarks of Dutch Environment Corporation BV in the Netherlands and/or other countries.




# D579\*


## LOUVRE WITH INSECTSCREEN

### AIR MANAGEMENT SYSTEMS


DIAM 100

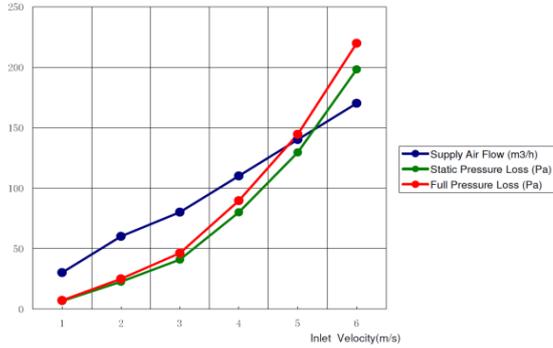


DIAM.100-L

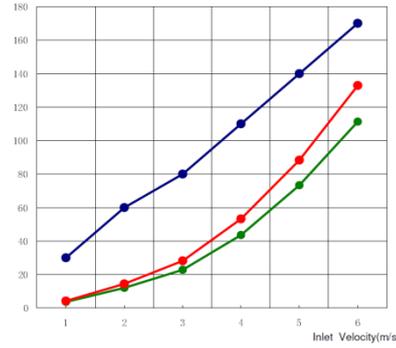


DIAM.125

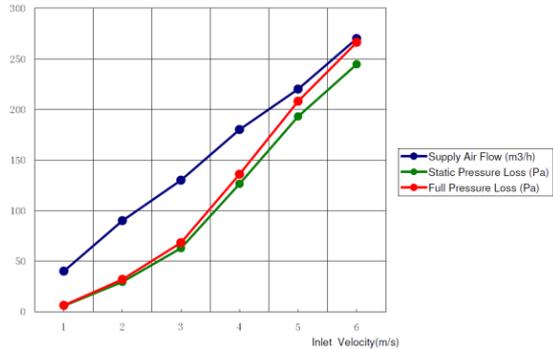


DIAM.125-L

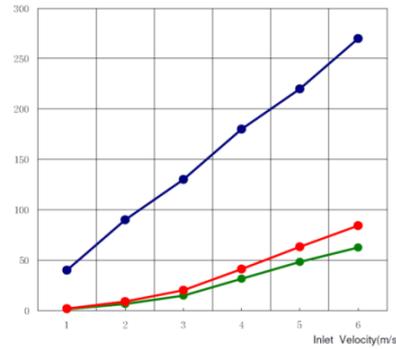


DIAM.150

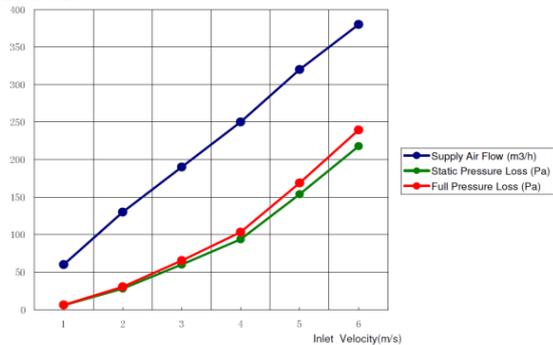


DIAM.150-L

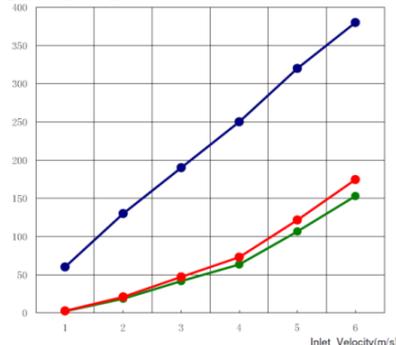

DIAM.160

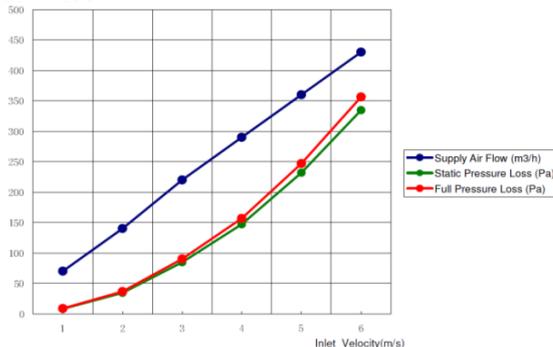

DIAM.160-L

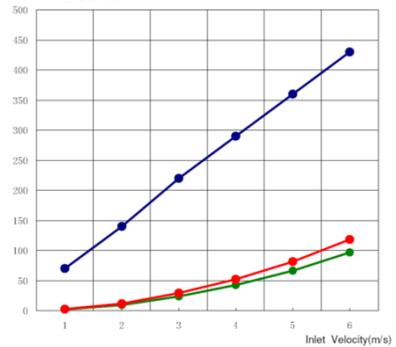

**LIABILITY:**

The information contained in this brochure was current on the publication date. DEC INTERNATIONAL reserves the right to make changes in details at any time without prior notice. In order to avoid misunderstandings, any interested party is advised to contact DEC INTERNATIONAL checking for any changes in materials and/or information after this brochure was published.

**PLEASE NOTICE:**

The consultant is responsible for the actual installation and mounting of the product. The mentioned values with respect to temperatures are not appropriate to be used to determine the physical properties. These properties are also dependent on humidity and the temperature of the air inside and outside of the H.V.A.C. system.

**TRADEMARKS:**

DEC International and the DEC logo are trademarks, or registered trademarks of Dutch Environment Corporation BV in the Netherlands and/or other countries.